



PCT/GB 2003/004529
Rec'd PCT/PTO 10/531857
19 APR 2005
#2
INVESTOR IN PEOPLE

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

REC'D 17 NOV 2003

WIPO PC:

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed *AmBrewster*

Dated 3 November 2003

BEST AVAILABLE COPY

Patents Form 1/77

Patents Act 1977
(Rule 16)

THE PATENT OFFICE

23 OCT 2002

RECEIVED BY FAX

The
Patent
Office

23OCT02 E758009-1 D02973
P01/7700 0.00-0224656.9

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference

NPS/P071992GB

2. Patent application number

(The Patent Office will fill in this part)

0224656.9

3. Full name, address and postcode of the or of each applicant (underline all surnames)

The Engineering Business Limited
Broomhaugh House
Riding Mill
Northumberland
NE44 6EG

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

GB

7688880001

4. Title of the invention

Mounting of Offshore Structures

5. Name of your agent (if you have one)

Harrison Goddard Foote

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Belgrave Hall
Belgrave Street
Leeds
LS2 8DD

Patents ADP number (if you know it)

14571001

7631310004

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if)

a) any applicant named in part 3 is not an inventor, or

Yes

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

Patents Form 1/77

0050704 23 Oct 02 05:54

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 8 10

Claim(s) 4 5

Abstract 1

Drawing(s) 7

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77)


Any other documents (please specify)

Fee Sheet

11.

I/We request the grant of a patent on the basis of this application.

Signature



Date

23 October 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Nigel Paul Sanderson

0113 233 0100

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

DUPLICATE

Mounting of Offshore Structures

The present invention relates to the mounting of structures offshore and more
5 especially to the mounting of structures such as wind turbines, wave machines and
tidal stream turbines.

Conventionally, wind turbines or the like are mounted offshore in a suitable
foundation. The wind turbines are transported to the installation site, either in a
10 complete state or for assembly on site, by means of a jack up barge. However, jack
up barges are expensive and can be difficult to use in certain locations where difficult
seabed conditions or strong currents occur.

The present invention therefore seeks to provide method and apparatus for
15 installation and alignment of offshore structures such as wind turbines which permits
the use of towed or self-propelled barges or other suitable vessels to support the
structure and further enables alignment of the structure at a desired angle (normally
vertical) even where the foundation is installed at an angle.

20 According to a first aspect of the present invention there is provided a foundation for
mounting an offshore structure, the foundation comprising a socket for receiving and
retaining an end part of the structure, the socket having a base surface preferably of
conical shape, an intermediate supporting part and an upper body having an internal
guiding surface for guiding said end part into the intermediate supporting part, said
25 guiding surface also forming a reaction surface operatively co-operating with
alignment means of the structure for alignment of the structure when inserted in the
foundation.

Preferably said guiding surface is frusto-conical.

30

Further preferably said intermediate supporting part has a substantially cylindrical inner surface sized to conform with a corresponding outer surface of said end part.

5 According to a second aspect of the invention there is provided a structure for mounting in the foundation of the first aspect of the invention, said structure comprising an end part for insertion into the socket of the foundation, said end part preferably having a leading end portion preferably of substantially conical shape corresponding to said conical base surface, and alignment means mounted on said end part operative to co-operate with said guiding surface when said end part is in the
10 socket to align the structure into a desired alignment.

In a preferred embodiment of this aspect the invention, the alignment means are removable.

15 Preferably, the outer surface of the end part is substantially cylindrical.

Preferably also, the a curved, substantially spherical or part spherical element is disposed on the tip of the leading end portion whereby the (preferably) conical leading end portion is prevented from fully abutting the conical base surface of the
20 socket.

According to a third aspect of the invention there is provided the combination of a foundation for mounting an offshore structure and a structure mountable in the foundation, wherein the structure comprises an end part preferably having a leading
25 end portion preferably of substantially conical shape and alignment means located on the leading end part, the foundation comprising a socket comprising a base surface preferably of substantially conical shape sized substantially to conform with the substantially conical end portion, an intermediate supporting part and an upper body having an internal guiding surface wherein the socket operatively receives the leading
30 end part such that the base surface and the end portion are in juxtaposition and the internal guiding surface operatively provides a reaction surface against which the

alignment means operatively act for adjustment of the structure into a desired alignment.

Preferably in this third aspect of the invention the alignment means are removeable.

5

Preferably also the internal guiding surface is frusto-conical.

In a much preferred embodiment, the inner surface of the intermediate supporting part and the outer surface of the end part of the structure are cylindrical.

10

In another preferred embodiment of this aspect of the invention said inner and outer surfaces are spaced apart in use. This allows the joint between the structure and the socket to be filled with grout to secure the structure in the socket in the desired alignment.

15

In another preferred embodiment a curved, substantially spherical or part spherical element is disposed on the tip of the leading end portion whereby the (conical) leading end portion is prevented from fully abutting the (conical) base surface of the socket. This feature assists in ensuring that a space between the structure and the socket is provided (for the insertion of grout) and also allows the structure to be aligned (with respect to the vertical) and also rotated as necessary before it is fixed in position.

20

A fourth aspect of the invention provides apparatus for mounting a structure as according to the second aspect of the invention in a foundation according to the first aspect of the invention, the apparatus comprising a transporting barge, means for retaining the structure on the barge during transportation in a reclined position, means for moving the structure from the reclined position to an upright position and for lowering the structure in said upright position over the side of the barge, and a guide wire attachable to the end of the structure for guiding the leading end of the structure into the socket.

25

30

Preferably the means for moving the structure from the reclined position to an upright position comprises a winched cable-stayed "A" frame.

- 5 Preferably the structure is retained while in its upright position, and lowered, by means of one or more clamps engaging the structure, the clamping arrangement allowing controlled axial movement of the structure relative to the means for supporting the structure.
- 10 Preferably the apparatus further comprises means for supplying grout to the joint between the end part of the structure and the socket.

- Preferably also the means comprise supply hoses which are operatively disconnectable from the a supply of grout and are sealable, and the apparatus further
- 15 comprises a buoy to which the supply hoses may be attached after disconnection from the supply of grout.

Preferably the apparatus further comprises means for recovering the alignment means after the structure has been mounted in the foundation.

20

According to a fifth aspect of the invention there is provided method of mounting an offshore structure in a sub-surface foundation, the method comprising:

- i) providing a sub-surface foundation according to the first aspect of the invention;
- 25 ii) providing a structure according to the second aspect of the invention and supporting the structure in a reclined position on a barge;
- iii) providing a winched cable stayed A frame on the barge and moving the structure from the reclined position to an upright position by means of the A frame;
- 30 iv) supporting the structure in its upright position by means of clamps attached to the A frame;

- v) attaching a guide wire to a end part of the structure and guiding the end part of the structure into the socket of the foundation by means of the guide wire;
 - vi) lowering the alignment means down the end part of the structure until the alignment means engage the internal guiding surface of the upper body of the socket and adjusting the alignment of the structure by means of the alignment means acting on the internal guiding surface until a desired alignment is achieved; and
 - vii) releasing the clamps supporting the structure.
- 5
- 10 A preferred embodiment of this aspect of the invention further comprises the steps of:
- viii) providing grout injection hoses and injecting grout into the joint between the structure and the socket;
 - ix) sealing the grout injection hoses; and
 - 15 x) attaching the sealed clamp hoses to a surface buoy.

Preferably the method of this embodiment comprises the further step of recovering the grout injection hoses and/or the alignment means when the grout in the joint has set.

20

For a better understanding of the invention and to show how the same may be carried into effect, reference will be made to the following drawings in which:

Figure 1 shows a schematic plan view of a structure according to the invention carried in a reclined position in a transporting barge;

25

Figure 2 is a schematic side view of the structure and barge of Figure 1;

Figure 3 is a schematic side view of the barge and structure with the structure in its upright position;

30

Figure 4 is a view similar to Figure 3 showing the structure lowered into the foundation;

Figures 5 and 6 are schematic side views illustrating the disconnection and removal
5 of the barge from the structure;

Figure 7 is a schematic side view illustrating the removal of the alignment means;

Figure 8 is a schematic side view similar to Figure 3 showing alternative clamps for
10 supporting the structure;

Figure 9 illustrates schematically on a larger scale the mounting of the structure in its foundation; and

15 Figure 10 illustrates schematically an alternative construction of the invention.

Referring now to the drawings, Figures 1 and 2 show a barge or other suitable vessel
2 carrying a structure in the form of a wind turbine 4 in a reclined position so that the nacelle 6 and rotor 8 are supported (the particular support means are not shown).
20 Typically the nacelle and rotor will have a weight of around 100 tonnes. The structure 4 has an end part 10 having a conical leading end portion 12. Alignment means 14 are disposed on the end part 10. The structure 4 is attached to an A frame 16 operated with winches 18. The winches may typically be 50 tonne winches. A
typical winch system for the "A" frame includes twelve fall lifting on each side with
25 the winches working at, say, 30m per minute line speed. In this arrangement, erection of the structure 4 to the upright position shown in Figure 3 takes about 10 minutes. The above mentioned parameters are exemplary only and the person skilled in the art will select suitable parameters according to the particular task in hand, such as the size, weight and location of the structure..

30

In the upright position, the structure 4 is supported by a number of clamps 20. In the clamping arrangement illustrated in Figures 3 and 4, the clamps 20 comprise two (or more) separate radial clamps, spaced axially along the structure. The structure is lowered from the barge 2 into the foundation 30 in a controlled manner by, for example, opening a lower one of the clamps and causing the upper one of the clamps to move downwardly, so taking the structure 4 downwardly towards the foundation 30. At the limit of movement of the upper clamp (or at a desired point before that), the lower clamp is engaged, and the upper clamp is released and returned to its initial position. The sequence is then repeated until the structure 4 is lowered into the foundation. The sequence may be applied in reverse for removal of the structure 4 from the foundation 30.

In a less preferred variation, separate means such as a crane are provided to support the weight of the structure and the clamps are used only for alignment of the structure 4.

In the clamping arrangement shown in Figure 8, clamps in the form of track type tensioners are used to support the structure 4. These track type tensioners take the form of a plurality of continuous articulated tracks arranged radially around the structure. Each track comprises a plurality of track links each articulated to a neighbouring track link to form a continuous loop. Each track link is provided with a gripping surface for gripping the structure 4. The tracks are arranged to lie axially with respect to the structure 4 so that by driving the tracks in a forward or reverse direction, the structure 4 may be moved up or down. An advantage of track type tensioners is that they can accommodate structure of shapes other than plain cylindrical, such as tapering shapes which is more difficult to achieve with the annular clamps of Figure 3 and 4. For this purpose, the track type tensioners can be mounted on a bogie arrangement which ensures that the tracks make contact with the structure along their entire working length rather than at a single point.

In erecting the structure 4, a combination of hydraulic cylinders and/or cables can be used to ensure that as the weight of the structure 4 passes overcentre the motion of the A frame is controlled. Alternatively, the pivots on which the A frame is mounted can be located to ensure that the weight always remains on the barge side of the pivot, so that the need to overcentre is avoided.

When the structure 4 is in its upright position a guide or pull wire is attached to the end part 10 of the structure 4. The guide wire is used to guide the end part 10 of the structure into a pre-positioned foundation 30. The foundation 30 includes a socket 32 having a base surface 34 having an internally conical shape and a generally cylindrical intermediate part 36. Mounted at an upper part of the intermediate part 36 is an upper body 38. The upper body 38 includes an internal surface 40 which is frusto-conical. As the structure 4 is lowered from the barge by use of the clamps 20 the inner surface 40 assists in guiding the end part 10 of the structure 4 into the socket 32, in combination with the conical leading end portion 12 and the guide wire. Once the structure 4 is accommodated in the socket 32, the structure provides a temporary means of locating the barge which permits movement of the barge in the swell of the water and rotationally around the structure 4 but prevents translational movement of the barge away from the structure.

An "interface ball" 13 in the form of a curved, spherical or part spherical element is disposed on the apex of leading end portion 12 (Figure 9). This interface ball has a number of functions. In particular, the interface ball ensures that the walls of the socket and of the end part 10 of the structure are maintained in slightly spaced apart relation. This allows rotation of the structure 4 with respect to the socket during installation and also allows some movement of the structure relative to the socket during installation so that a desired alignment of the structure 4 with respect to the vertical can be achieved, even where the foundation is not absolutely correctly aligned. Normally, the desired alignment is vertical. The spacing apart of the walls of the structure and socket also provides a void which can be filled with grout to set the structure in its desired alignment. During the alignment of the structure, the

clamps 20 are placed in a constant low tension to accommodate heaving up and down of the barge 2 in any swell.

When the structure 4 has been located in the socket 32, alignment of the structure 4 is undertaken. For this purpose, alignment means 14 are lowered down the end part 10 until they contact the inner surface 40. The alignment means preferably comprise a plurality of hydraulic cylinders and typically four such cylinders are provided. One the alignment means are in place, the clamps 20 can be released. The alignment means 14 are then used to set the structure 4 in its desired alignment. The inner surface 40 acts at this stage as a reaction surface against which the alignment means 14 (hydraulic cylinders) act to provide the required movement of the structure to adjust its position and, when that position is achieved, to retain the structure in that position. One the desired alignment is achieved, the alignment means can be locked in position.

15

In one preferred arrangement of the invention where the installation of the structure is essentially permanent, grout is injected into the void between the walls of the socket 32 and the end part 10 of the structure through suitable hoses. When the joint is full of grout, the hoses can be sealed off and attached to a buoy. The barge 2 can then move away and be engaged in other work. When the grout is fully set a barge 2 may return to retrieve the alignment means 14.

20

In an alternative arrangement, the alignment means 14 may be left in place when locked in position and no grout is then required. This facilitates later removal of the structure 4, for example for maintenance on land. In this case, the alignment means 14 which may be shove cylinders, screw jacks or the like can be built as a fixed part of the structure 4 so that for removal of the structure 4 it is not necessary to pick up cables, hoses and the like to initiate release of the alignment means 14, these being provided integrally with the structure.

25

30

In a variation of the invention illustrated in Figure 10 and interface piece 50 is provided at the top of the foundation 30'. The interface piece 50 is set in a desired alignment during installation in the foundation 30', such as by grouting (54) to the foundation 30'. The interface piece 50 includes an inner surface 540 analogous to
5 inner surface 40. Thus the structure 4 can be lowered into a socket 32' of the interface piece 50 in the same manner as described above in relation to foundation 30, but because the interface 50 determines the correct alignment, separate alignment means are not needed. A number of tapered clamps 52 are desirably provided to grip the structure and retain it in its desired position. In this construction, the weight of
10 the structure 4 essentially hold the structure in place in the foundation. For removal of the structure 4 the tapered clamps may be removed by a tool frame which releases the structure and allows it to be removed from the foundation.

Claims:

1. A foundation for mounting an offshore structure, the foundation comprising a socket for receiving and retaining an end part of the structure, the socket having a
5 base surface, an intermediate supporting part and an upper body having an internal guiding surface for guiding said end part into the intermediate supporting part, said guiding surface also forming a reaction surface operatively co-operating with alignment means of the structure for alignment of the structure when inserted in the foundation.
- 10 2. A foundation as claimed in claim 1 wherein said guiding surface is frusto-conical.
3. A foundation as claimed in claim 1 or 2 wherein said intermediate supporting part has a substantially cylindrical inner surface sized to conform with a
15 corresponding outer surface of said end part.
4. A structure for mounting in the foundation of any of claims 1 to 3, said structure comprising an end part for insertion into the socket of the foundation, said end part having alignment means mounted on said end part operative to co-operate
20 with said guiding surface when said end part is in the socket to align the structure into a desired alignment.
5. A structure as claimed in claim 4 wherein the alignment means are removable.
- 25 6. A structure as claimed in claim 4 or 5 wherein the outer surface of the end part is substantially cylindrical.
7. A structure as claimed in claim 4, 5 or 6 wherein the end part further includes a leading end portion of substantially conical shape.

30

8. A structure as claimed in claim 7 wherein a curved, substantially spherical or part spherical element is disposed on the tip of the leading end portion whereby the conical leading end portion is prevented from fully abutting the base surface of the socket.

5

9. A foundation as claimed in any of claims 1 to 3 for co-operation with a structure as claimed in claim 7 or 8 wherein the base surface of the socket is of substantially conical shape to generally conform with the conical leading end portion of the structure.

10

10. The combination of a foundation for mounting an offshore structure and a structure mountable in the foundation, wherein the structure comprises an end part having a leading end portion of substantially conical shape and alignment means located on the leading end part, the foundation comprising a socket comprising a base surface of substantially conical shape sized substantially to conform with the substantially conical end portion, an intermediate supporting part and an upper body having an internal guiding surface wherein the socket operatively receives the leading end part such that the conical base surface and the conical end portion are in juxtaposition and the internal guiding surface operatively provides a reaction surface against which the alignment means operatively act for adjustment of the structure into a desired alignment.

15

20

11. A combination as claimed in claim 10 wherein the alignment means are removeable.

25

12. A combination as claimed in claim 10 or 11 wherein the internal guiding surface is frusto-conical.

30

13. A combination as claimed in claim 10, 11 or 12 wherein the inner surface of the intermediate supporting part and the outer surface of the end part of the structure are cylindrical.

14. A combination as claimed in claim 13 wherein said inner and outer surfaces are spaced apart in use.
- 5 15. A combination as claimed in any of claims 10 to 14 wherein a curved, substantially spherical or part spherical element is disposed on the tip of the leading end portion whereby the conical leading end portion is prevented from fully abutting the conical base surface of the socket.
- 10 16. Apparatus for mounting a structure as claimed in any of claims 4 to 8 in a foundation as claimed in any of claims 1 to 3 or 9, the apparatus comprising a transporting barge, means for retaining the structure on the barge during transportation in a reclined position, means for moving the structure from the reclined position to an upright position and for lowering the structure in said
- 15 upright position over the side of the barge, and a guide wire attachable to the end of the structure for guiding the leading end of the structure into the socket.
17. An apparatus as claimed in claim 16 wherein the means for moving the structure from the reclined position to an upright position comprises a cable-stayed "A"
- 20 frame.
18. An apparatus as claimed in claim 16 or 17 wherein the structure is retained while in its upright position, and lowered, by means of one or more clamps engaging the structure.
- 25 19. An apparatus as claimed in any of claims 16 to 18 further comprising means for supplying grout to the joint between the end part of the structure and the socket.
20. An apparatus as claimed in claim 19 wherein the means comprise supply hoses
- 30 which are operatively disconnectable from the a supply of grout and are sealable,

the apparatus further comprises a buoy to which the supply hoses may be attached after disconnection from the supply of grout.

21. An apparatus as claimed in any of claims 16 to 20 further comprising means for
5 recovering the alignment means after the structure has been mounted in the foundation.

22. A method of mounting an offshore structure in a sub-surface foundation, the method comprising:

- 10 i) providing a sub-surface foundation as claimed in any of claims 1 to 3 or 9;
- ii) providing a structure as claimed in any of claims 4 to 8 and supporting the structure in a reclined position on a barge;
- iii) providing a winched cable stayed A frame on the barge and moving the structure from the reclined position to an upright position by means of the A
15 frame;
- iv) supporting the structure in its upright position by means of clamps attached to the A frame;
- v) attaching a guide wire to a end part of the structure and guiding the end part of the structure into the socket of the foundation by means of the guide wire;
- 20 vi) lowering the alignment means down the end part of the structure until the alignment means engage the internal guiding surface of the upper body of the socket and adjusting the alignment of the structure by means of the alignment means acting on the internal guiding surface until a desired alignment is achieved; and
- 25 vii) releasing the clamps supporting the structure.

23. A method as claimed in claim 22 further comprising the steps of:

- viii) providing grout injection hoses and injecting grout into the joint between the structure and the socket;
- 30 ix) sealing the grout injection hoses; and
- x) attaching the sealed clamp hoses to a surface buoy.

24. A method as claimed in claim 23 including the further step of

xi) recovering the grout injection hoses and/or the alignment means when the grout in the joint has set.

5

25. A method substantially as hereinbefore described with reference to any of Figures 1 to 10.

10

26. A combination substantially as hereinbefore described with reference to any of Figures 3 to 10.

27. A structure substantially as hereinbefore described with reference to any of figures 1 to 10.

15

28. An apparatus substantially as hereinbefore described with reference to any of figures 1 to 5, 7 or 8.

Abstract**Mounting of Offshore Structures**

5

Offshore structures such as wind turbines, wave machines and tidal stream turbines are mounted in a previously located foundation including a socket. The foundation includes an upper body with a conical inner surface which acts as a guide for

10

inserting a leading end of the structure into the socket. The conical surface also provides a reaction surface for alignment means for setting the vertical alignment of the structure when inserted in the socket. Clamp means are provided supported by an A frame for controlled lowering of the structure into the socket.

1/7

Figure 1


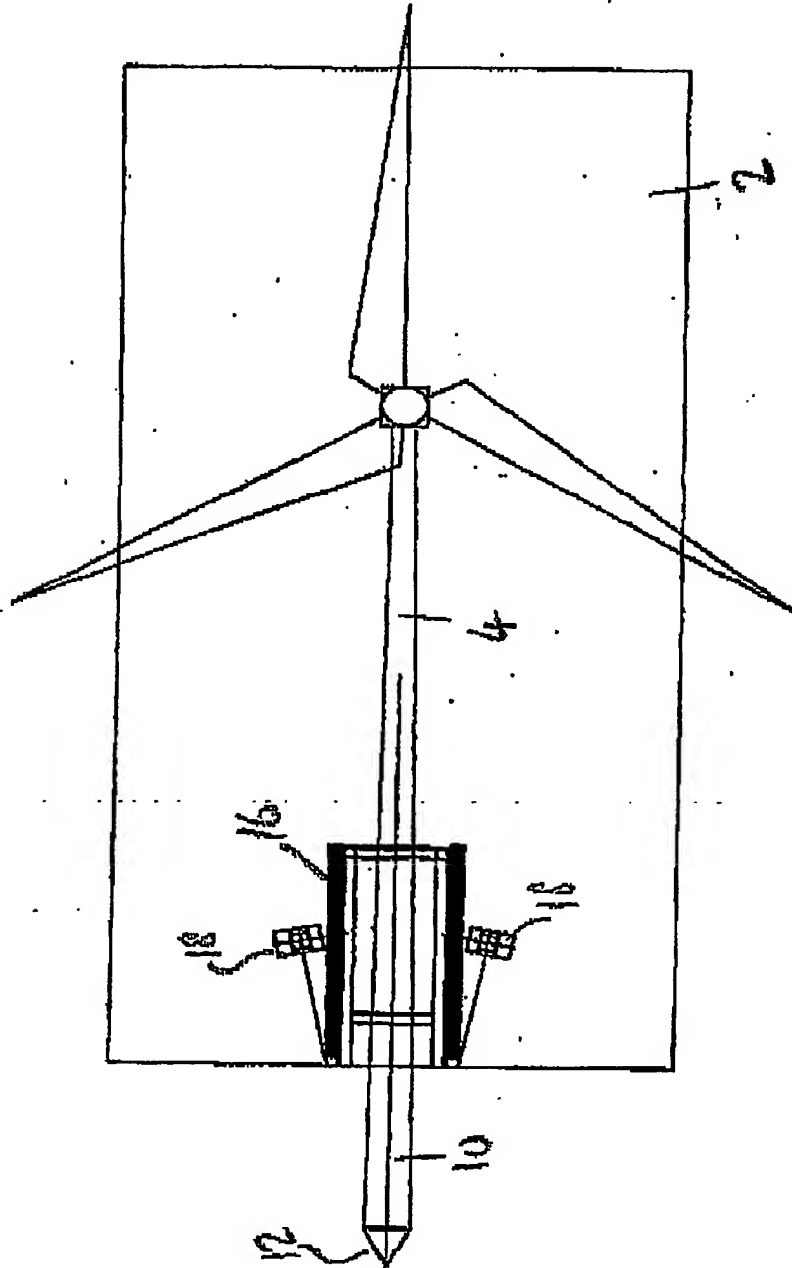


Figure 2

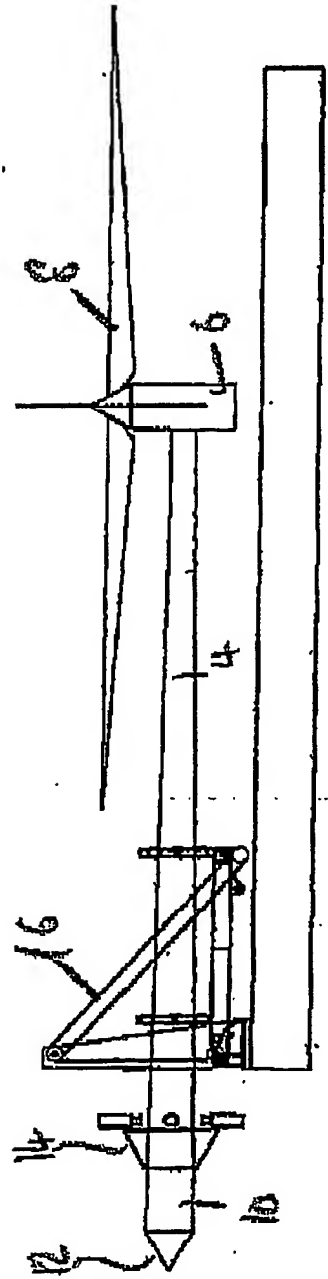

2/7

Figure 4

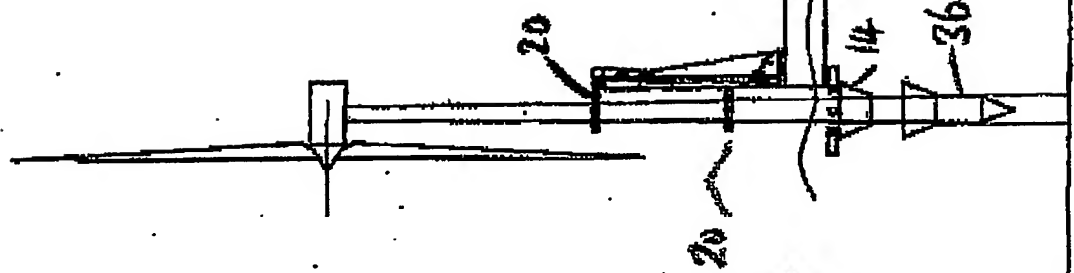


Figure 3

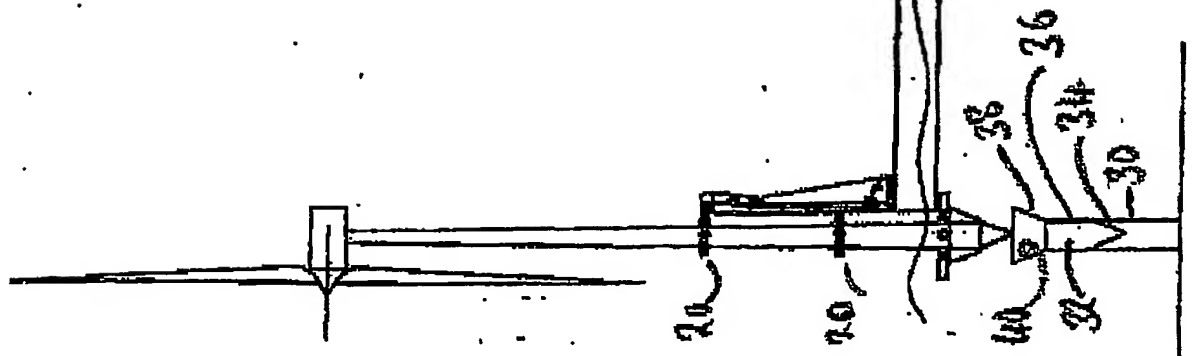


Figure 6
3/7



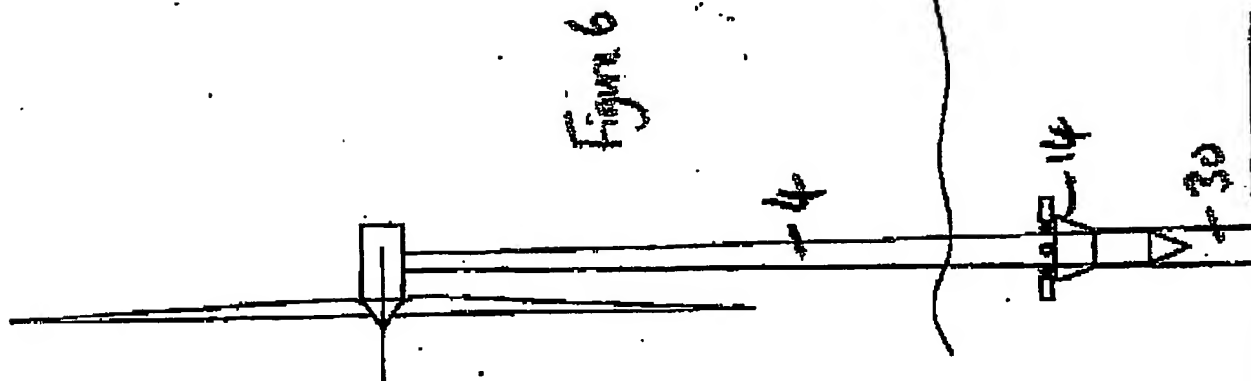


Figure 5

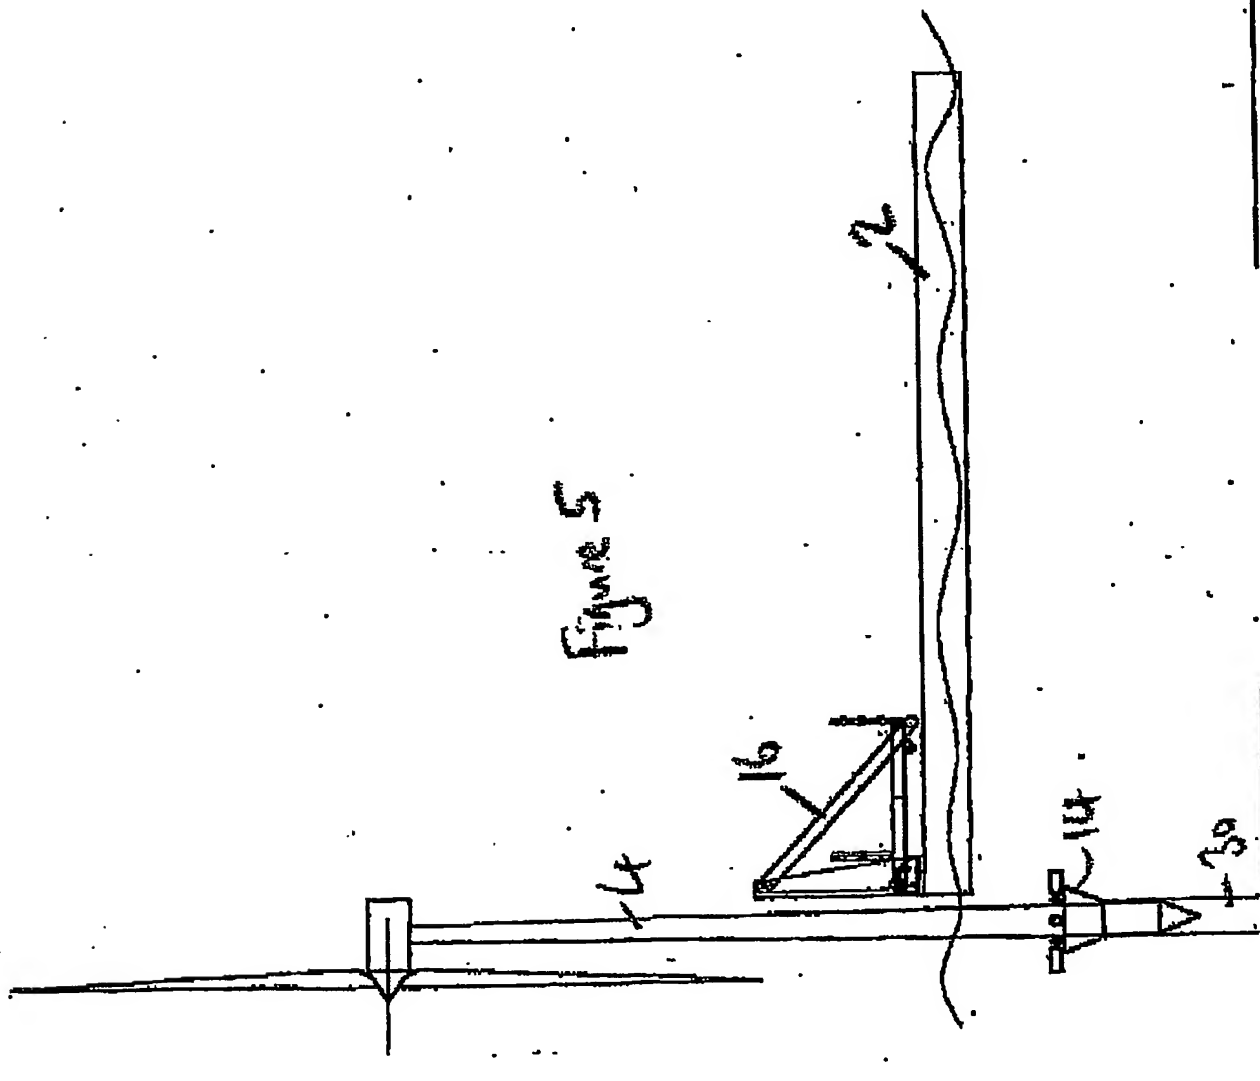


4/7

Figure 7

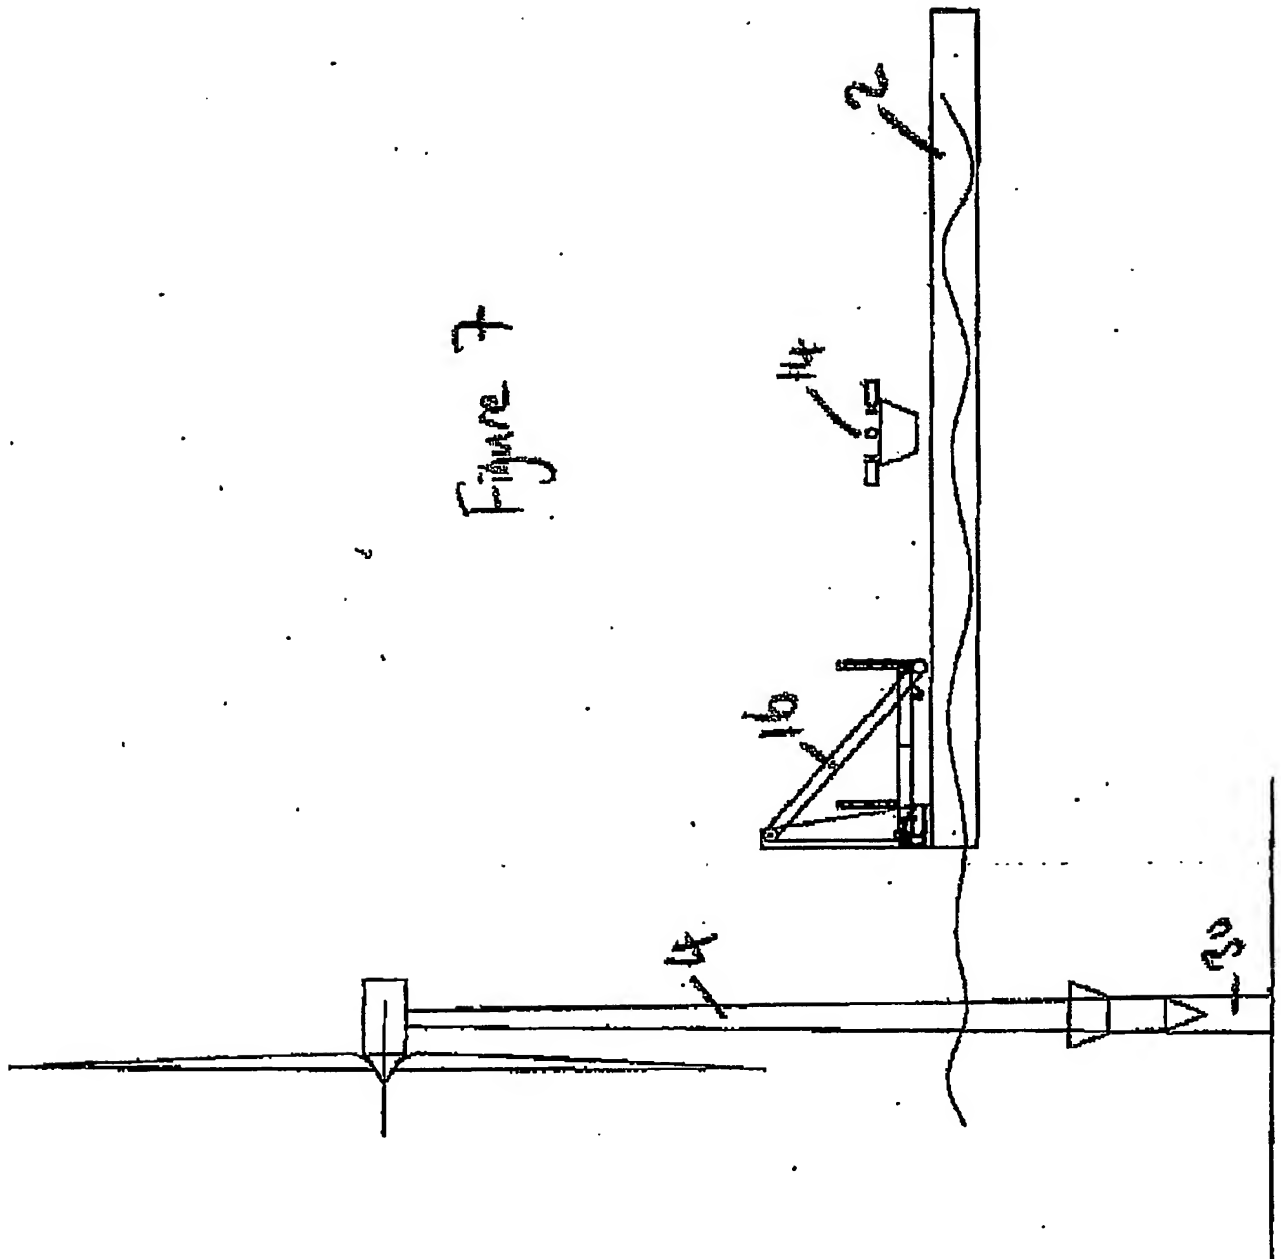


5/7

Figure 8

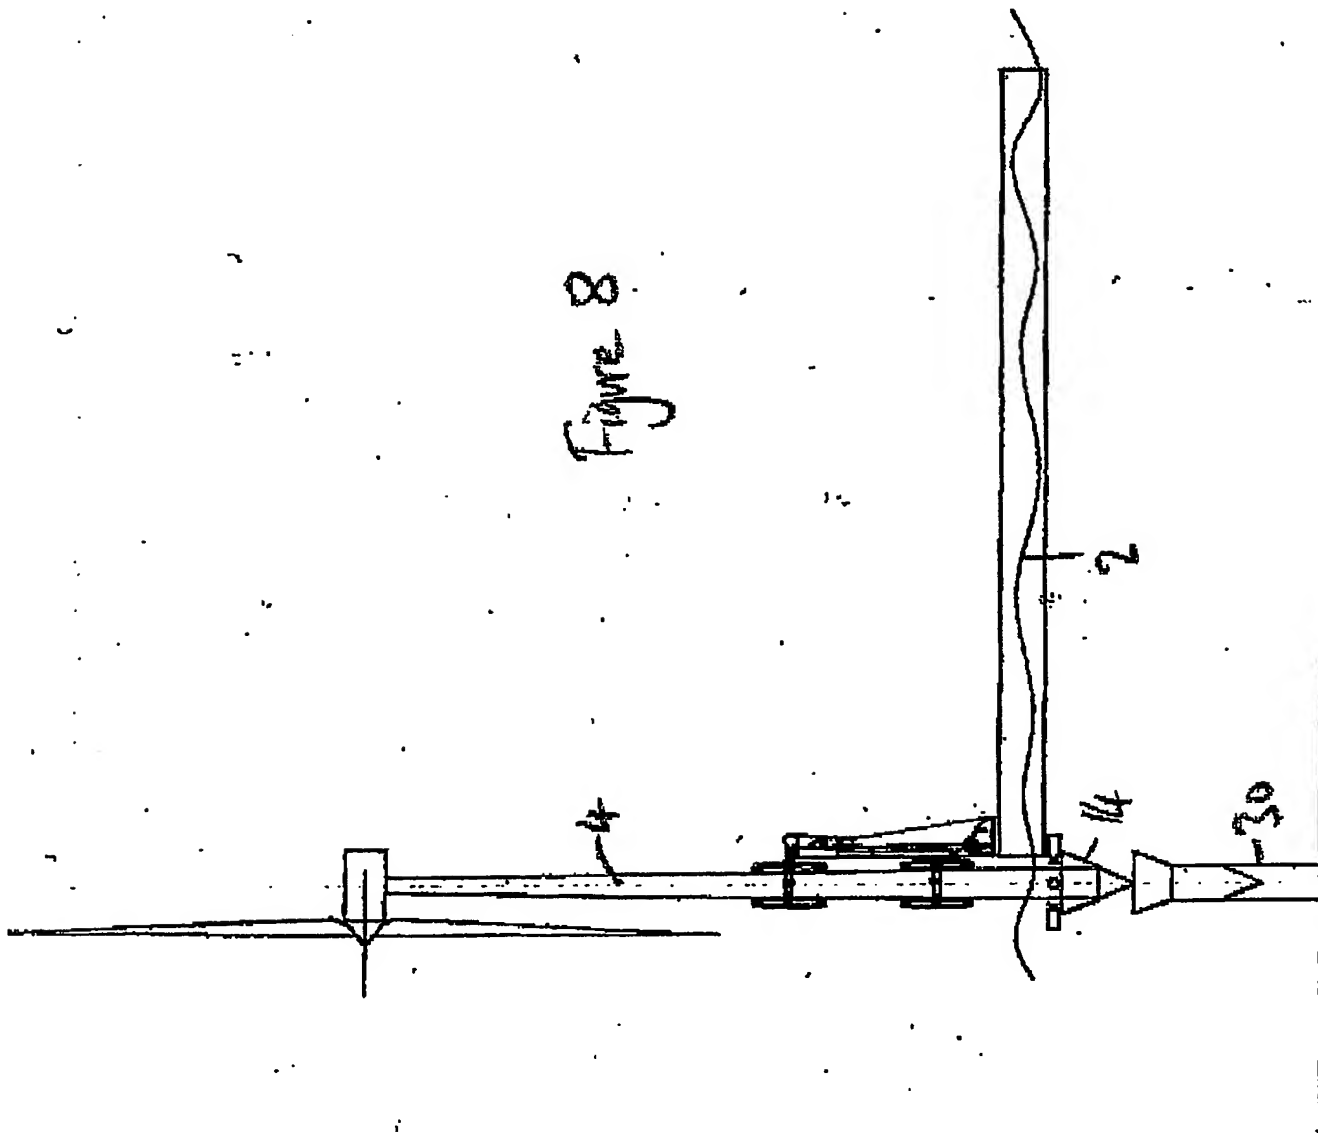


6/7

Figure 9

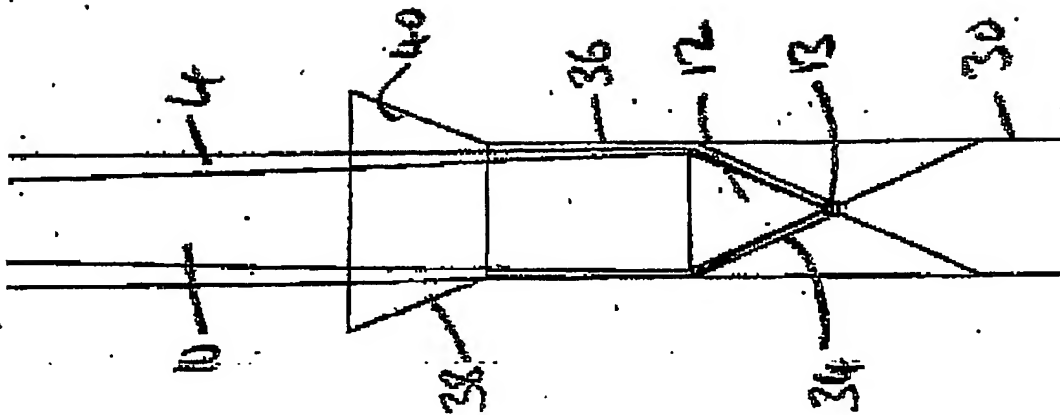


7/7

Figure 10

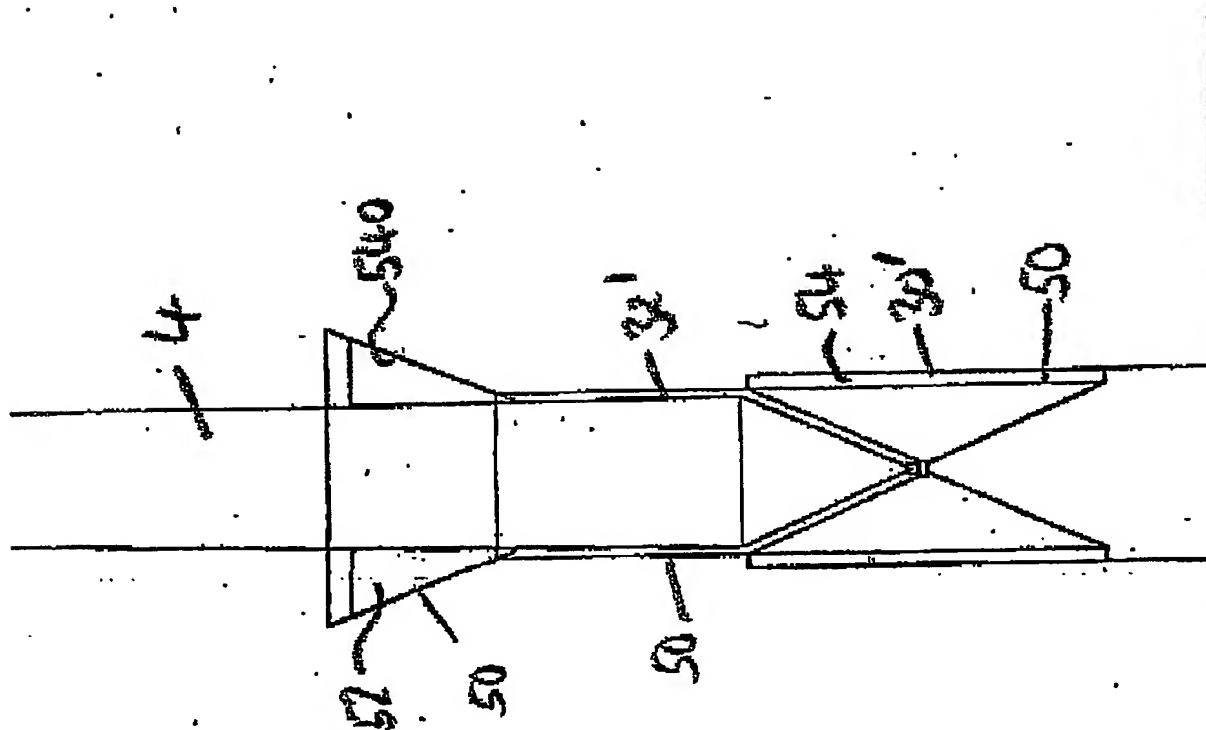

PCT Application
GB0304529

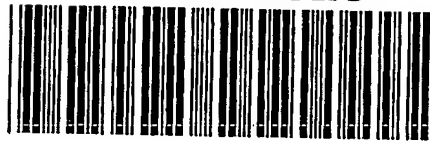

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.